

ARK-DS220

OPS ION2-based Digital Signage Platform

NEW



Features


- Integrated NVIDIA GT218 (ION2) graphic module for Full HD playback
- Designed compliant with OPS (Open Pluggable Standard)
- Embedded Intel® Atom™ D525 dual-core (fan-based) or Intel® Atom™ N455 single-core processor (fanless)
- Supports HDMI-CEC, DP, UART, and USB2.0 via JAE 80-pin connector
- Slot-in integration, easy maintenance
- Supports SUSIAccess and Embedded Software APIs

Specifications

Processor System	CPU	Intel Atom D525 1.8 GHz, Intel Atom N455 1.66 GHz
	System Chipset	ICH8M
	L2 Cache	1 MB/512 KB (Depends on CPU Type)
	BIOS	AMI 16 MB SPI BIOS
Memory	Technology	1 x DDR3 204-pin SO-DIMM
	Max. Capacity	Max. up to 4 GB (w/D525); or 2 GB (w/N455)
Display	Chipset	NVIDIA GT218
	Memory Size	Independent display memory 512 MB
	Resolution (Chipset support)	HDMI/DP: up to 1920 x 1080 (via OPS interconnection)
	Output	VGA x 1
Storage	SATA Interface	Supports 2.5" SATA HDD (support max 9.5 mm height only)/SSD/SATA Slim Card
	Interface	Gigabit LAN Controller
Ethernet	Controller	Intel 82567V for LAN
	Connector	1 x RJ-45
	JAE TX25	1
I/O Interface	VGA	1 (D-sub 15-pin)
	LAN	1 (RJ-45)
	USB	2 (USB 2.0 compliant)
	Audio	2 audio phone jacks for Mic-in, Line-out
	Serial	1 x COM (RS-232)
	Mini-PCIe (Internal)	1
	Management	ACPI 2.0
Power Requirement	Power Consumption Input	Average 18 W, Maximum 30 W
	Voltage	12 V-24 V DC-in (via OPS interconnection)
	Input Voltage	12 V-24 V DC-in (via OPS interconnection)
Watchdog Timer	Output	Interrupt, system reset
	Interval	255-level timer interval, setup by software
Physical Characteristics	Dimensions (W x H x D)	200 x 119 x 30 mm (OPS compliant)
	Weight	1.5 kg (3.3lb)
Environment	Temperature	0 - 40 °C (operating) Extended temp support up to 50° C available via SSD/SATA Slim Card (Fan-based supported)
	Relative Humidity	95% @ 40° C (non-condensing), operating
	Vibration Resistance	0.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 Oct./min, 1 hr/axis.
Software Development Kit	Operating System	Supports WEST7, XP Embedded, Linux
	Remote Device Management	SUSIAccess (available by ARK-DS220FQ)
	System Recovery	Acronis (available by ARK-DS220FQ)
	Anti-Virus	McAfee (available by ARK-DS220FQ)
Certification	Electromagnetic	CE/FCC Class A, CCC, BSMI
	Safety	UL, CB


Dimensions

Unit: mm (inch)

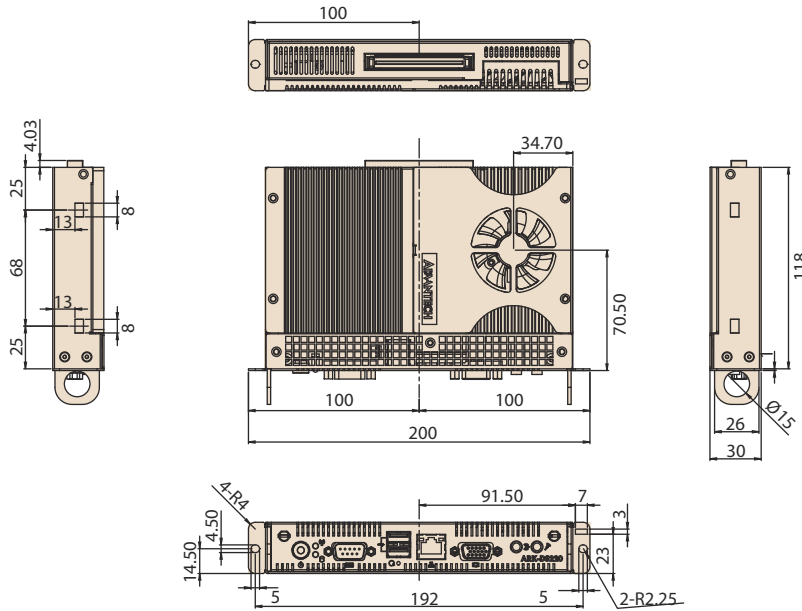

Intel Atom D525 Dual-core Process (Fan-based)

Front

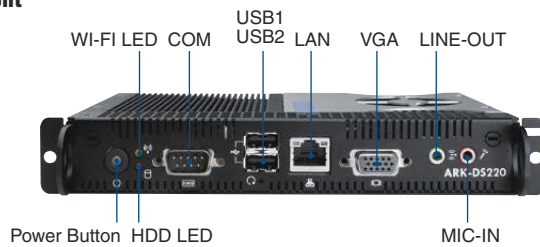

Rear



Fanless Option with Intel Atom N455 Single-core CPU



Ordering Information

Part Number	Description
ARK-DS220F-D6A1E	ARK-DS220, D525+GT218, 2 G RAM, 160 G HDD (Fan-based)
ARK-DS220F-N5A1E	ARK-DS220, N455+GT218, 2 G RAM, 4 G SSD (Fanless)
ARK-DS220B-D6A1E	ARK-DS220, D525+GT218 (barebone kits)
ARK-DS220B-N5A1E	ARK-DS220, N455+GT218 (barebone kits)
ARK-DS220FQ-D6A1E	ARK-DS220, D525+GT218, 2G RAM, 160G HDD, WES7E, SUSIAccess, McAfee, Acronis

Optional Items

Part Number	Description
AMO-I005E	Docking board for ARK-DS220, OPS JAE TX24/DC-In Jack/ HDMI/DP/COM/USB
AMO-WIFI03E	Centrino N100 WiFi miniPCIe for ARKD

Embedded OS

Part Number	Description
2070010688	XPE WES2009 ARK-DS220 V4.0 ENG w/ Acronis PSNL
2070010689	XPE WES2009 ARK-DS220 V4.0 24MUI w/ Acronis
2070010414	Image WES7E V5.0 ENG
2070010415	Image WES7P V5.0 ENG
2070010416	Image WES7E V5.0 JAP
2070010417	Image WES7E V5.0 CHS
2070010418	Image WES7E V5.0 CHT